


FORT COLLINS SENIOR CENTER  
 DANCE FITNESS ROOM  
 BY: TERRY PALMER STAGE SERVICES  
 970.593.8567

SOUND SYSTEM LAYOUT / PROPOSAL  
 GROUND PLAN

JANUARY 27, 2013

COLORADO STATE ELECTRICAL CONTRACTORS LICENSE NUMBER 438

WALL MOUNT SUB SPKR  
 YORKVILLE YX 185  
 WITH WALL MOUNT BRACKET  
 TYP. OF 2- WIRED 8 OHM

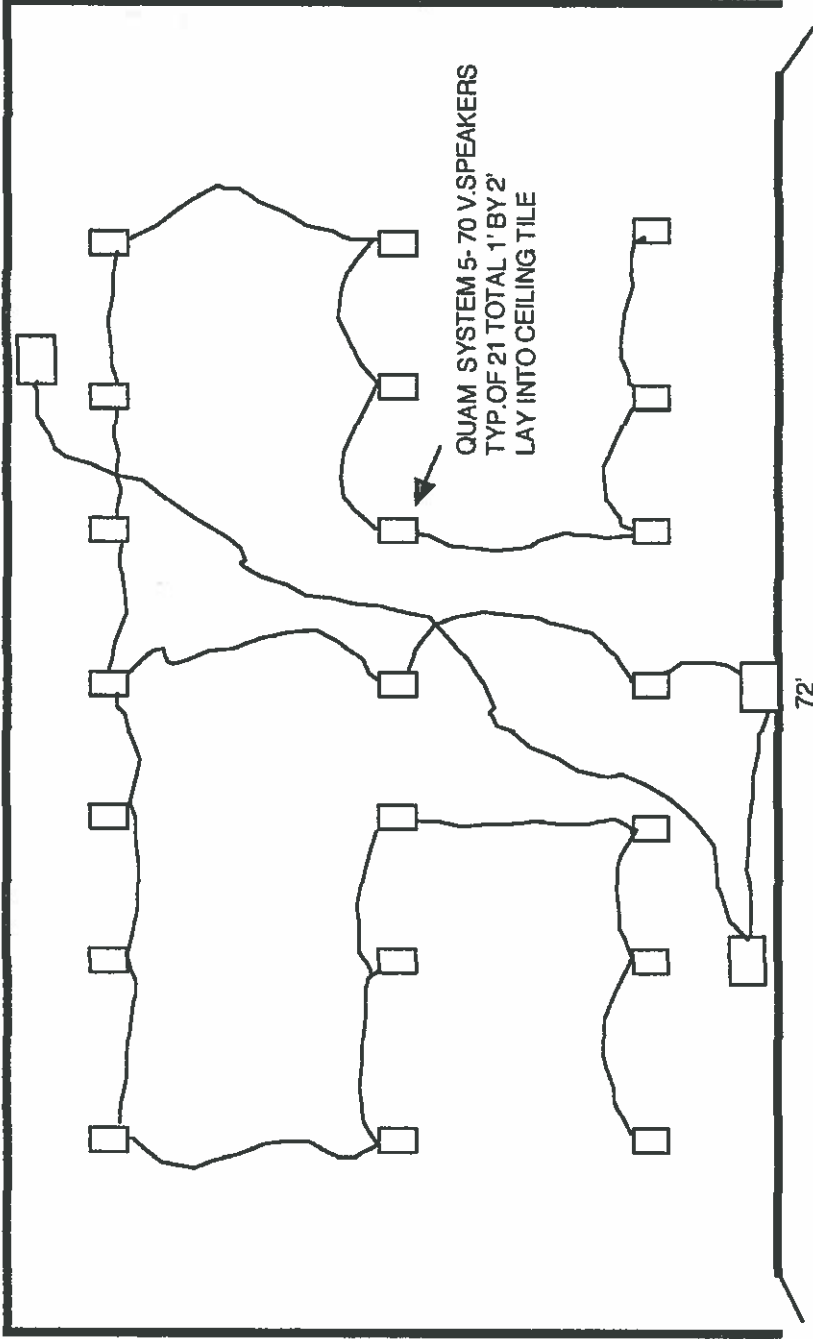

EQUIPMENT RACK- RAXXESS SWR-10-17 WITH FRONT DOOR

1	POWER SWITCH/ DISTRIBUTION- RAXXESS PD 800
2	WIRELESS HEADPHONE MIC SYSTEM- SHURE PGXD14/PG30 W/ 1 RU TRAY, RAXXESS UTS-1
3	MIC/ LINE MIXER FOR 1 POD AND CD AND WIRELESS- PEAVEY SMR821A
4&5	CD / MP3 PLAYER NUMARK MP103 USB
6	BLANK- RAXXESS- SFT-1
7	70 VOLT AMP FOR OVERHEAD SPEAKERS- 150 WATT- CREST AUDIO PA 150
8	8 OHM AMP FOR WALL MOUNT SUB SPEAKERS- 150 WATT- CREST AUDIO PA 150
9	AND 10 ACCESSORY DRAWER- RAXXESS- ESD-2

**BILL OF MATERIALS**

1. 1-RAXXESS SWR-10-17 RACK W/ LOCKING FRONT DOOR
2. 1-RAXXESS POWER DISTRO-PD800
3. 1- SHURE WIRELESS HEADPHONE MIC SYSTEM PGXD 14 /PG30
4. 1- ONE RACK SPACE TRAY FOR ABOVE- UTS-1
5. 1- PEAVEY SMR 821A MIXER
6. 1- NUMARK CD /MP3 PLAYER- MP103USB
7. 1- BLANK PLATE- SFT-1
8. 1- CREST PA-150 FOR 70 VOLT SPEAKERS
9. 1- CREST PA-150 FOR SUB WOOFER SPEAKERS
- 10.- 1- ACCESSORY DRAWER- ESD-2
11. 2- YORKVILLE VX 185 SUBWOOFERS WALL MOUNT
12. 2- QUICKLOC WALL SPEAKER MOUNTS SB-205
13. 21EA. QUAM SYSTEM 5 1 FOOT BY 2 FOOT LAY IN 70 VOLT SPEAKERS FOR CEILING TILES
14. 70 FOOT #12-2 INSTALLATION WIRE FOR SUBS
15. 500 FOOT #20 GA. TWO CONDUCTOR INSTALLATION WIRE FOR CEILING SPEAKERS

TOTAL FOR MATERIALS ABOVE ONLY- \$6,783.00  
 TOTAL FOR LABOR ONLY- \$3,000.00

**GRAND TOTAL FOR ABOVE \$9,783.00**

*Agreed to complete work for: \$9,500.00*