

Administrative Services

Purchasing Division

CITY OF FORT COLLINS

ADDENDUM No. 1

Bid #5810

LEAD ABATEMENT AT POLICE FIRING RANGE

SPECIFICATIONS AND CONTRACT DOCUMENTS

Description of Bid #5810 Lead Abatement at Police Firing Range

OPENING DATE: September 23, 2003, at 3:00p.m. (Our Clock)

To all prospective bidders under the specifications and contract documents described above, the following changes are hereby made.

1 PROJECT SUMMARY

The City of Fort Collins and Walsh Environmental Scientists and Engineers, LLC (WALSH) conducted a contractor walk-through on September 16, 2003 for the removal and decontamination of lead contamination from the City of Fort Collins Police Firing Range, located at 2554 Midpoint Drive in Fort Collins, Colorado. Clarification as to the location and amount of lead-contaminated materials to be removed and work areas was required. A supplemental drawing indicating material removal areas can be found in Appendix A.

2 REVISED SCOPE OF WORK

The additional materials to be removed are described in the section below and shown on supplemental drawing located in Appendix A. The contractor is responsible for determining exact quantities of materials to be removed.

2.1 Additional Materials to be Removed

In the firing range portion of the building where decontamination is to take place, all the 2' x 4' lay-in ceiling tiles including the 2' x 4' tiles located behind (to the south of) the shooting booths are to be removed and properly disposed. These materials will require management and disposal as hazardous waste. The contractor is responsible for proper material containerization, labeling, manifesting, and transportation functions related to disposal.


2.2 Work Areas

The contractor will be allowed to use the training area located to the south of the shooting range for equipment staging/storage, decontamination unit set-up, and waste load-out purposes. This area will be tested by the owner/owners representative prior to the initiation of the project to determine background lead levels. In addition, the training area will be re-tested upon completion of the project by the owner/owners representative to determine post-decontamination and removal lead levels. If it is determined that this portion of the

building is adversely impacted by contractor activities, subsequent cleaning and confirmation sampling and analysis costs incurred by the owner/owners representative will be the sole responsibility of the contractor.

If you have any questions please contact John Stephen, CPPO, Senior Buyer, at 970-221-6777.

RECEIPT OF THIS ADDENDUM MUST BE ACKNOWLEDGED BY A WRITTEN STATEMENT ENCLOSED WITH THE BID/QUOTE STATING THAT THIS ADDENDUM HAS BEEN RECEIVED.

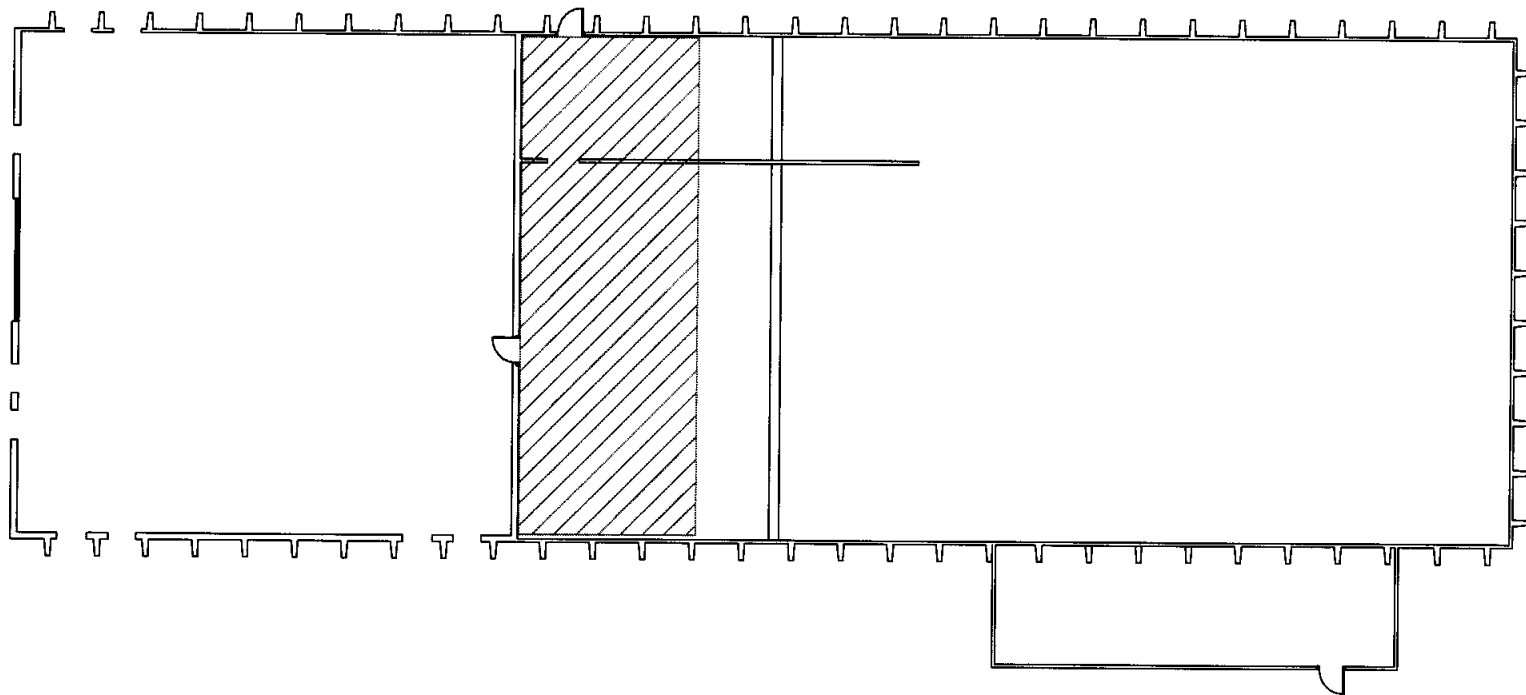

LEGEND

 LEAD - CONTAMINATED LAY-IN-CEILING TILES (2'x4')
56.3 mg/L

**ADDITIONAL
REMOVAL AREAS**


No.	Revisions	Date	By
#1			
#2			
#3			
#4			



Walsh
Environmental Scientists and Engineers, LLC

CITY OF FORT COLLINS - FIRING RANGE GROUND LEVEL

I:\ACAD\533115331-020\shooting range.dwg 8/03 JM



Date: 9/03	Drawn By: RW
Project No. 5331-020	Checked By: T. Sanders
Figure: 5	Sheet 5 of 5