

WORK ORDER FORM
PURSUANT TO A MASTER AGREEMENT BETWEEN
THE CITY OF FORT COLLINS
AND

Fox Construction Systems

WORK ORDER NUMBER:

PROJECT TITLE: Spring Canyon Park concrete repairs

ORIGINAL BID/RFP NUMBER & NAME: Small and Miscellaneous Concrete Services

MASTER AGREEMENT EFFECTIVE DATE (Contract Signed): November 1, 2019

WORK ORDER COMMENCEMENT DATE: 10/30/2019

WORK ORDER COMPLETION DATE: 5/1/2020

MAXIMUM FEE: (time and reimbursable direct costs): \$21,005

PROJECT DESCRIPTION/SCOPE OF SERVICES:

See attached quote and details for various concrete repairs at Spring Canyon Park.

Service Provider agrees to perform the services identified above and on the attached forms in accordance with the terms and conditions contained herein and in the Master Agreement between the parties. In the event of a conflict between or ambiguity in the terms of the Master Agreement and this Work Order (including the attached forms) the Master Agreement shall control.

The attached forms consisting of 6 (six) page(s) are hereby accepted and incorporated herein, by this reference, and Notice to Proceed is hereby given after all parties have signed this document.

SERVICE PROVIDER: DocuSigned by:
Reed W Nelson
68B9548C49F7404... _____ **Date:** November 12, 2019
Reed W Nelson Estimator

ACCEPTANCE: DocuSigned by:
Jill Wuertz
B73D089F749040A... _____ **Date:** October 30, 2019
Jill Wuertz, Project Manager

REVIEWED: DocuSigned by:
Elliot Dale
3C00507F4191423... _____ **Date:** November 7, 2019
Elliot Dale, Buyer or Senior Buyer

ACCEPTANCE: _____ **Date:** _____
Gerry Paul, Purchasing Director
(if greater than \$60,000)



Fox Construction Systems, LLC

P.O BOX 389

WINDSOR, CO 80550 US

estimating@fcsnoco.com

Estimate**ADDRESS**

Jill Wuertz
Spring Canyon Park Curb & Sidewalk

| ESTIMATE # | DATE | EXPIRATION DATE |
|------------|------------|-----------------|
| 1033 | 10/03/2019 | 10/31/2019 |

| DATE | ACTIVITY | DESCRIPTION | QTY | RATE | AMOUNT |
|------------|--------------------------------------|---|------|----------|----------|
| 10/03/2019 | DEMOLITION | A: Remove and Replace Sidewalk along the north end of the 1st base dugout on the western base ball field (Size of scope is below minimums) | 1 | 2,000.00 | 2,000.00 |
| 10/03/2019 | TRUCKING | A: Haul Off & Disposal | 1 | 450.00 | 450.00 |
| 10/03/2019 | Equipment | A: Skid Steer (Concrete will be bucketed in by skid steer) | 1 | 980.00 | 980.00 |
| 10/03/2019 | DEMOLITION | B: Remove and Replace 4 squares of concrete that have sunken | 200 | 10.00 | 2,000.00 |
| 10/03/2019 | TRUCKING | B: Haul off & Disposal | 1 | 450.00 | 450.00 |
| 10/03/2019 | Equipment | B: Skid Steer with Breaker | 1 | 980.00 | 980.00 |
| 10/03/2019 | DEMOLITION | C: Clear area outlined in attached map, sawcut existing sidewalk, cut and set grade for 2' wide drain pan and catch pan, Labor and Materials to form and pour new concrete. Slope concrete to center (drain pan) then to the north. | 175 | 10.00 | 1,750.00 |
| 10/03/2019 | Structural Fill / Base Course | C: Import & Placement of Structural Base Course | 175 | 2.50 | 437.50 |
| 10/03/2019 | TRUCKING | C: Haul off & Disposal | 1 | 450.00 | 450.00 |
| 10/03/2019 | Equipment | C: Skid Steer | 1 | 980.00 | 980.00 |
| 10/03/2019 | Equipment | C: Mini Excavator | 0.50 | 870.00 | 435.00 |
| 10/03/2019 | DEMOLITION | D: Demo Existing Curb and adjacent flatwork to make room for new 2' wide curb & gutter, (Sawcutting, Jackhammer includes skid steer) | 350 | 5.00 | 1,750.00 |
| 10/03/2019 | Equipment | D: Skid Steer with Breaker | 1 | 980.00 | 980.00 |
| 10/03/2019 | Structural Fill / Base Course | D: Import & Placement of Structural Base Course | 350 | 2.50 | 875.00 |
| 10/03/2019 | Rebar & Reinforcing Steel | D: Furnish, Drill and Install #4 dowels 18" OC | 175 | 4.50 | 787.50 |
| 10/03/2019 | CONCRETE | D: Labor & Material to Form & Pour | 20 | 380.00 | 7,600.00 |

| DATE | ACTIVITY | DESCRIPTION | QTY | RATE | AMOUNT |
|------------|-----------------|--|-----|-----------|-----------|
| 10/03/2019 | TRUCKING | Curbing D: Haul Off & Disposal | 2 | 450.00 | 900.00 |
| 10/03/2019 | Discount | DISCOUNT if all options are chosen (Combines equipment, trucking cost and removes minimums charge) | 1 | -2,800.00 | -2,800.00 |

NOTES:

- See attachment for area map
- Areas of work will be taped off with caution tape, expected duration if all options are selected.
- Fort Collins Parks to remove the fencing for option C, additionally they will provide the rough grading on the north side of the path (remove the tree / shrub and provide access)
- Expected Durations
 - A: one day
 - B: one day
 - C: one-two days
 - D: two-three days
 - If all selected: 4-5 days

TOTAL

\$21,005.00

EXCLUSIONS:

- Winter Conditions
- Overtime / After Hours Work
- Traffic Control
- Landscaping of any kind (Unmarked irrigation lines may be hit by form stakes)
- Irrigation Work
- Caulking
- Pumping

Accepted By

Accepted Date



C




A




B

D


D

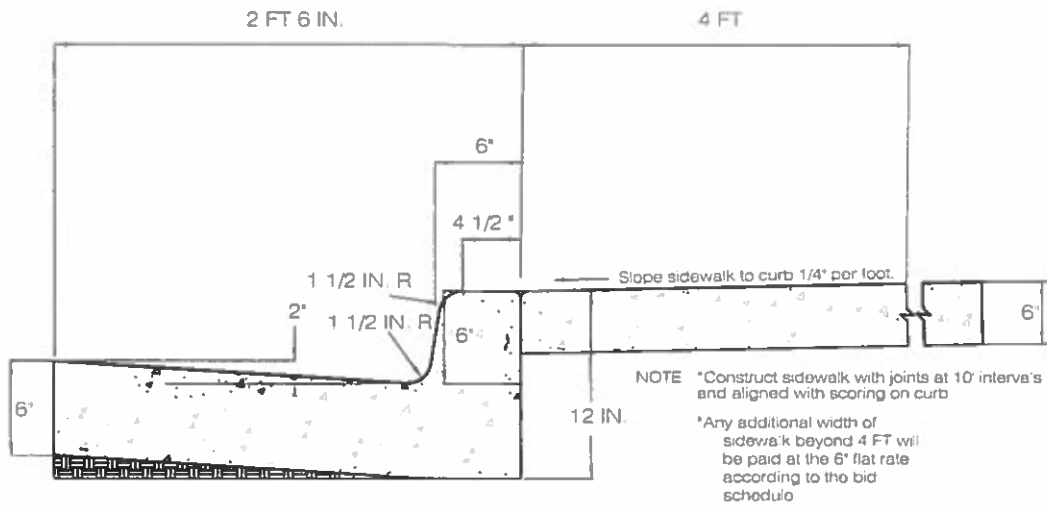


ATTACHED SIDEWALK DETAIL (Vertical Curb, Gutter, and 6" Sidewalk)

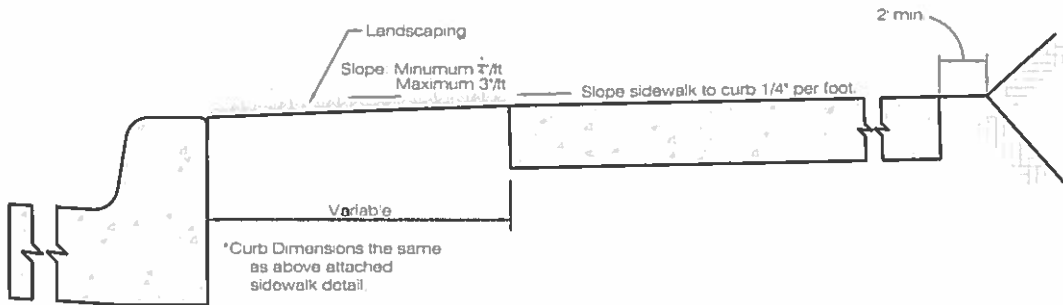

DETACHED SIDEWALK DETAIL

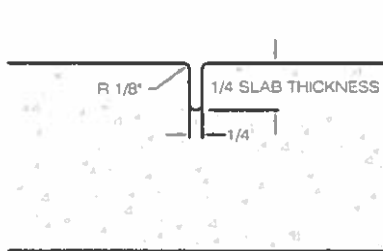

WEAKENED PLANE JOINT

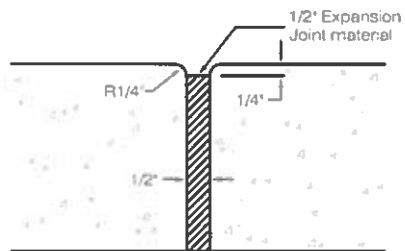

INSTALL IN LOCATIONS SPECIFIED IN CHAPTER 22

EXPANSION JOINT

SIDEWALK DETAIL

Fort Collins Revision of
LARIMER COUNTY URBAN
AREA STREET STANDARDS


**CONSTRUCTION
DRAWINGS**

REVISION NO:

DATE: 10/24/18

DRAWING


FC1602

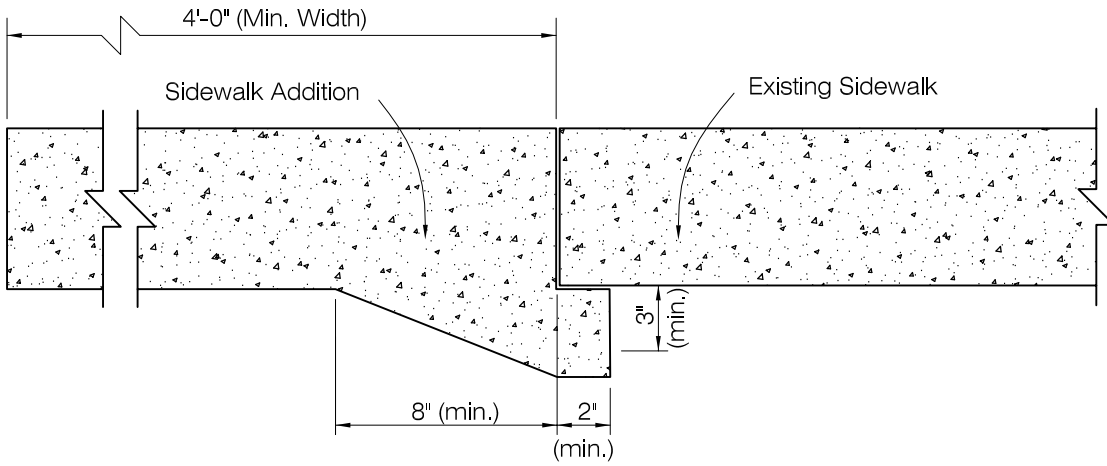

ADDITION TO EXISTING SIDEWALK

NOTES:

1. New walk additions shall be placed to the same line and grade as the existing walk.
2. Match transverse tooled joints to existing tooled joints.

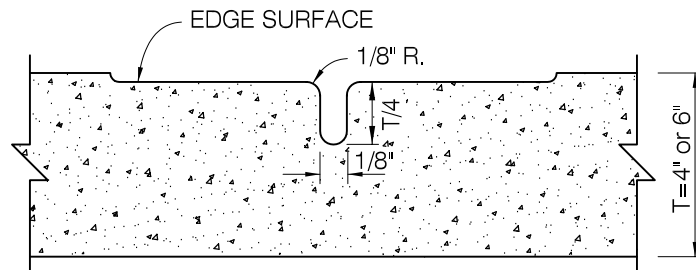

TOOL JOINT FOR WALKS

NOTES:

1. Joint shall be cut 1/4 thickness of initial concrete; tool joint for walks.


SIDEWALK WIDENING DETAILS

LARIMER COUNTY
URBAN AREA
STREET STANDARDS

CONSTRUCTION
DRAWINGS

REVISION NO:
DATE: 08/07/00

DRAWING
2501

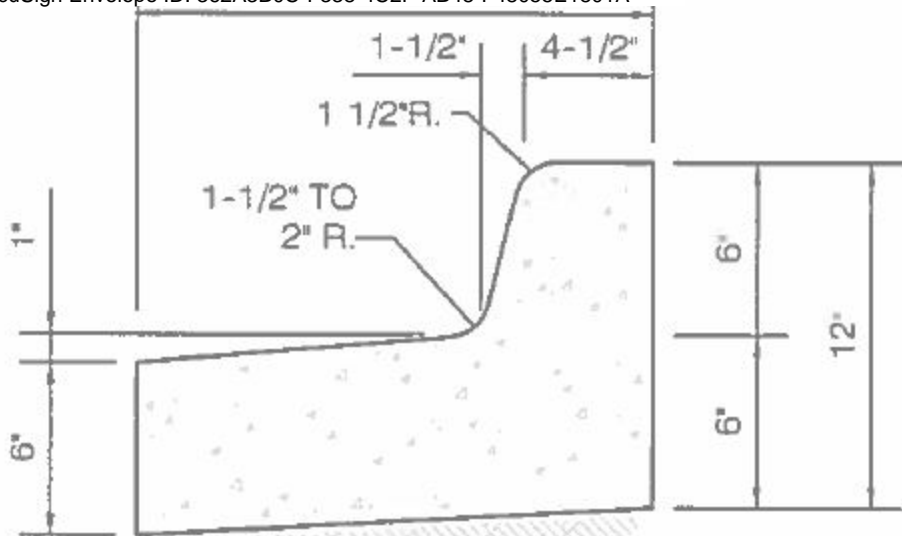

VERTICAL OUTFALL CURB & GUTTER